




Cancelli ad anta battente | Swing gates

RAM 220 / 300

Attuatori elettromeccanici a pistone telescopici ambidestri per ante a battente fino a 2,2 m e 3 m
Telescopic reversible rod actuator for swing leaves up to 2,2 m and 3 m



OPERATING LIMITS

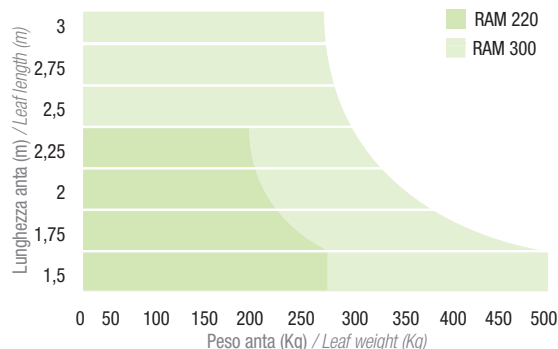





ARTICLE	PRODUCT CODE	DESCRIPTION
RAM 220 24V	RM220 24V	24V per ante a battente fino a 2,2 m <i>24V for swing leaves up to 2,2 m</i>
RAM 300 24V	RM300 24V	24V per ante a battente fino a 3 m <i>24V for swing leaves up to 3 m</i>
RAM 300 230V	RM300 230V	230V per ante a battente fino a 3 m <i>230V for swing leaves up to 3 m</i>

■ Su richiesta versione con alimentazione 110 VAC / 110 VAC power supply version on demand

TECHNICAL CHARACTERISTICS

Dati elettrici / Electrical information	RAM 220 24V	RAM 300 24 V	RAM 300 230 V
Alimentazione / Power supply	24 VDC	24 VDC	230 VAC
Potenza assorbita / Power consumption	70 W	110 W	280 W
Assorbimento max / Current input	3 A	5 A	1,2 A
Spinta max / Maximum thrust	1500 N	2000 N	1800 N
Spinta nom. / Nominal thrust	500 N	600 N	700 N
Intermittenza di lavoro / Duty cycle	30%	uso intensivo / intensive use	40%
Grado di protezione (IP) / Protection rating (IP)	IP24D	IP24D	IP24D
Classe di isolamento / Insulation class	3 (SELV)	3 (SELV)	1 (messa a terra/earthing)
Temp. di funzionamento / Working temperature	-20°C / +50°C	-20°C / +50°C	-20°C / +50°C
Velocità / Speed	18 mm/s	21 mm/s	16 mm/s
Peso / Weight	7 Kg	7,8 Kg	8,3 Kg

DIMENSIONS

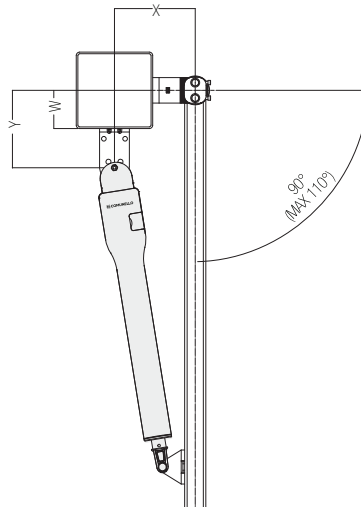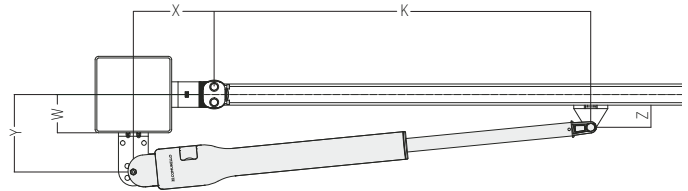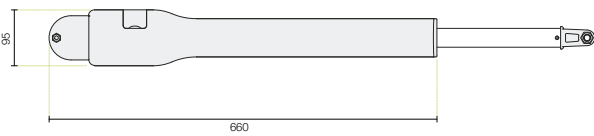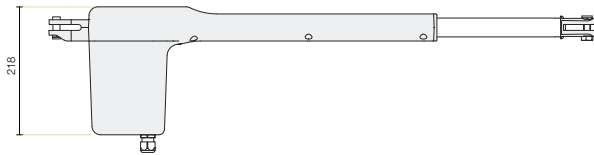


MAX OPENING	X	Y	Z	K 220/300	K 500	WMAX
110°	150	152	77	925	1075	50
90°	170	182	77	885	1035	50


RAM 220 / 300 ACCESSORIES



Centralina / Control unit
QUAD-24V-HP
QUAD-230V-HP



Centralina / Control unit
QUAD-24V-1M
QUAD-230V-1M



Centralina / Control unit
QUAD-24V-2M
QUAD-230V-2M



Elettroserratura 12V orizzontale
12V horizontal electric lock
AC 10



Elettroserratura 12V verticale
12V vertical electric lock
AC 20



Antenna esterna / Outdoor antenna
AC 30



Tabella segnaletica / Signage table
AC 40



Kit batteria / Battery kit
AC 50